


SCART "PERITEL" RECOMMENDED PIN ALLOCATION

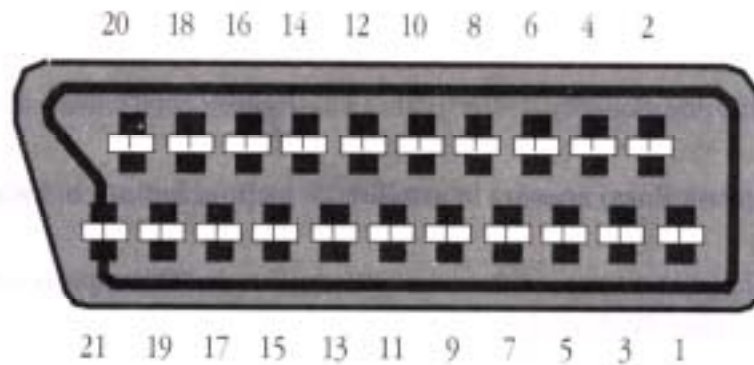

1	Audio Output RIGHT	500 - 700 mV ($\leq 1K\Omega$)
2	Audio Input RIGHT	500 - 700 mV ($\leq 10K\Omega$)
3	Audio Output LEFT	500 - 700 mV ($\leq 1K\Omega$)
4	Audio Common Ground	0V
5	Blue Return	
6	Audio Input LEFT	500 - 700 mV ($\leq 10K\Omega$)
7	Blue (Input or Output)	0.7V \pm 3dB (75 Ω)
8	Function Switching (slow)	To TV /VCR
9	Green Return	
10	No Connection	
11	Green (Input or Output)	0.7V \pm 3dB(75 Ω)
12	No Connection	
13	Red Return	
14	Meter Out	0.7V \pm 3dB(75 Ω)
15	Red (Input or Output)	
16	Blanking (Rapid Switching)	
17	Video Return	
18	Blanking Return	
19	Video or Baseband Output	1 V \pm 3dB(75 Ω)
20	Video Input	1 V \pm 3dB(75 Ω)
21	Common Return	0V

The SCART connectors of this receiver are equipped as follows:-

		TV	VCR	DECODER
1	Audio Output RIGHT	O	O	O
2	Audio Input RIGHT		O	O
3	Audio Output LEFT	O	O	O
6	Audio Input LEFT		O	O
8	Function Switching (slow)	O	O	
19	Video Output	O	O	O/BB
20	Video Input		O	O